


## Certificate



Reference No. 411214

## Control circuit device and switching element

Type designation

NP8

Certificate holder

Zhejiang Chint Electrics Co. Ltd. Chint High-tech Industrial Zone

North Baixiang Wenzhou, Zhejiang

CHINA

The product complies with the standard(s)

EN 60947-5-1:1997 and A1+A2+A12

Date of expiry

20 December 2009

EU Directive information

The product satisfies the provisions for CE marking according to the Low

Voltage Directive 73/23/EEC and 93/68/EEC.

- Wallell

Terms in Intertek Semko's Agreement on certification. Additional information in Appendix.

Certification Body

Intertek Semko AB, Product Certification

Place Kista - Stockholm

Signed

Erik Wallerfelt

Date 20 December 2004







Technical data

Type designation Rated voltage (V) Rated current (A) Frequency (Hz)

IP-Class BRAND name:

Product information

NP8

120--415AC, 125--250DC (see product information)

I<sub>e</sub>=0.27--6 (see product information), I<sub>th</sub>=10

50/60

54 (mounted)

CHNT

AC-15,  $U_e/I_e$ : 415V/1.9A, 240V/3A, 120V/6A. DC-13,  $U_e/I_e$ : 250V/0.27A, 125V/0.55A

The IP-classing has been tested together with Chint's mounting

box type NPH1

Manufacturing site(s)

Zhejiang Chint Electrics Co. Ltd. Chint High-tech Industrial Zone North Baixiang Wenzhou, Zhejiang CHINA





All t	ypes of	pushbutton	have the	same	basic	contactor	block.	Operated	by	manual.
-------	---------	------------	----------	------	-------	-----------	--------	----------	----	---------

No. of circuit: 1, 2 and 3

IP degree of head part: IP54

Ratings of contactor block: Ith=10A

Uti	ilization category		Ratings	
AC-15	U <sub>e</sub> (V)	415	240	120
	I <sub>n</sub> (A)	1.9	3	6
DC-13	U <sub>e</sub> (V)	250	125	1
	I <sub>n</sub> (A)	0,27	0,55	1

## Ratings for illuminated pushbutton:

Type of lamp	LED lamp	ned then
U <sub>e</sub> (V)	AC/DC 6, 12, 24, 36, 110, 220	A Part of the State of the Stat
I <sub>n</sub> (A)	≤20mA	THE STATE OF THE S

## Type Designation:

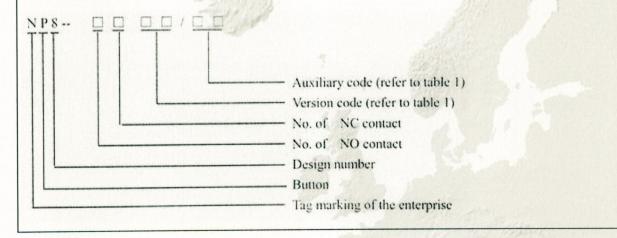






Table 1

	Version	Auxiliary code		
Code	Designation			
BN	Flush button			
GN	Projecting button			
М	Mushroom-headed reset button	Max. Diameter of operating mechanism:		
ZS	Mushroom-headed self-locking and rotary reset button	1 [Ф40] 2 [Ф60]		
MD	Illuminated mushroom-headed reset button			
SD	Illuminated double-headed button			
XD	Illuminated rotary button	21[Two position locking] 22[Two positions reset]		
Х	Rotary button	31[Three position locking] 33[Three positions reset]		
Y	Keyed button	37[Left position locking; right position reset]		
	Mount dis	38[Right position locking; left position reset]		
S	Double-headed button	Alleria )		
BND	Illuminated flush button			
GND	Illuminated projecting button			
D Indicator light		W 197 + 1970		





This certificate, which includes production control, is considered to constitute sufficient support for an EC Declaration of Conformity and CE marking of the product according to the Low Voltage Directive 73/23/EEC and 93/68/EEC.

Certification Body

Intertek Semko AB, Product Certification

Place Kista - Stockholm

Signed

Erik Wallerfelt

Date 20 December 2004

Page 4 (4)