

# SNE3 RCD Sockets & Spurs

## Technical Specification

|                         |  |
|-------------------------|--|
| RCD Type                | Latching / Passive   |
| Voltage Rating          | 240v AC 50Hz   |
| Current Rating          | 13A  |
| Rated Tripping current  | 30mA   |
| Breaking Capacity       | 250A   |
| Short Circuit Withstand | 1500A  |
| Ambient operating Temp: | -5°C to +40°C  |
| Operating speed         | <40ms  |
| Contact Break           | Double Pole  |
| Minimum Box Depth       | 35mm   |
| Cable Capacity          | 5x2.5mm <sup>2</sup> / 2x4mm <sup>2</sup> / 1x6mm <sup>2</sup> |



SNE3-1130FS



SNE3-1130SP



SNE3-2130FS




SNE3-2130SM



SNE3-2230SM

| Part No.    | Description  |
|-------------|--|
| SNE3-1130FS | RCD Fused Spur Plastic                                   |
| SNE3-1130SP | 1-Gang, Switched Plastic RCD Socket                      |
| SNE3-1230SP | 2-Gang, Switched Plastic RCD Socket                      |
| SNE3-2130FS | RCD Fused Spur Metal with Surface Mount Box              |
| SNE3-2130SM | 1-Gang, Switched Metal RCD Socket with Surface Mount Box |
| SNE3-2230SM | 2-Gang, Switched Metal RCD Socket with Surface Mount Box |

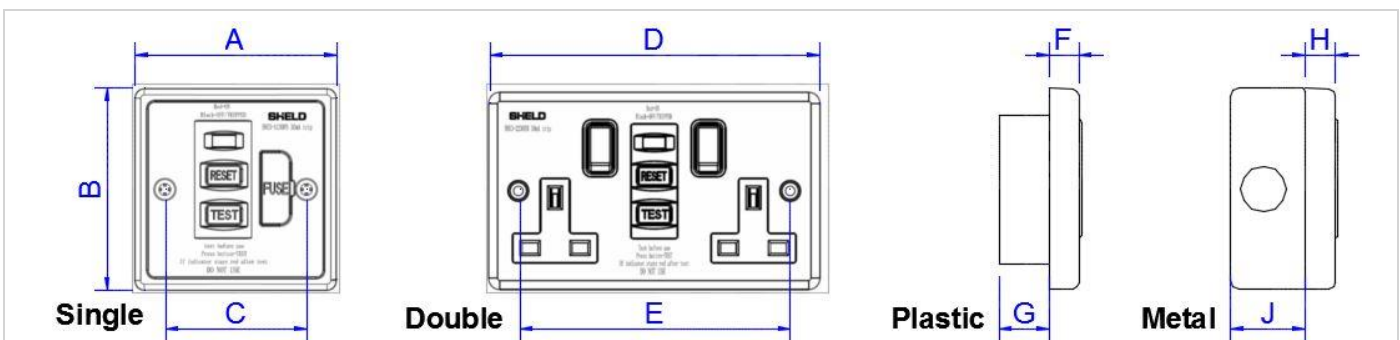

## SNE3 DIMENSIONS (mm)

| Part No.    | A  | B  | C    | D   | E     | F    | G  | H    | J  | Metal | Plastic |
|-------------|----|----|------|-----|-------|------|----|------|----|-------|---------|
| SNE3-1130FS | 86 | 86 | 60.3 | -   | -     | 14.5 | 21 | -    | -  | -     | ✓       |
| SNE3-1130SP | 86 | 86 | 60.3 | -   | -     | 14.5 | 21 | -    | -  | -     | ✓       |
| SNE3-1230SP | -  | -  | -    | 146 | 120.6 | 14.5 | 21 | -    | -  | -     | ✓       |
| SNE3-2130FS | 86 | 86 | 60.3 | -   | -     | -    | -  | 14.5 | 38 | ✓     | -       |
| SNE3-2130SM | 86 | 86 | 60.3 | -   | -     | -    | -  | 14.5 | 38 | ✓     | -       |
| SNE3-2230SM | -  | 86 | -    | 146 | 120.6 | -    | -  | 14.5 | 38 | ✓     | -       |